
CONTACT FRONT/ 5mm **BACK** 29mm SIDE / \$.5mm **END**

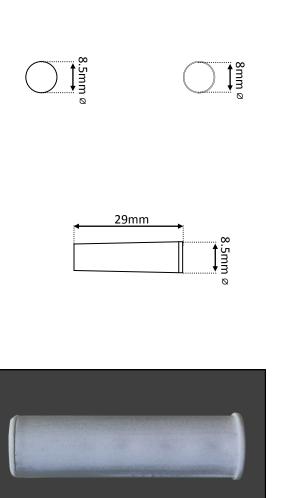

MAGNET

DESCRIPTION

Grade 2, Class III 4 wire flush pencil contact.

Round end.

30cm 4 wire fly lead attached.

Single reed, normally closed.

(complete circuit when magnet present).

VARIANTS

C30B—4 wire flush pencil contact, round end, brown.

ACTIVATION

Reed switch, ~15mm operating gap.

WIRING

Red Tamper loop White Reed switch

MATERIALS

Plastic casing.

Ferrite/Alnico V magnet.

Rhodium reed.

Adhesive sealant.

TEMPERATURE RANGE

-40 to +50 degrees Celsius.

ELECTRICALLY RATED AS FOLLOWS

500mA Max DC.

500mA Max AC.

1 – 100v DC.

125v AC Max.



РНОТО

Unit 84 Seawall Road Ind. Estate Cardiff UK CF24 5TH

Tel: +44 (0) 2920 488 129

Fax: +44(0) 2920 489 132

Drawing #: C30

Gareth Carpenter Drawn:

Date: 01/06/2017

Revision:

All dimensions in mm Do not scale



© Knight Fire & Security Products Ltd All cases of infringement will be pursued.