

DHI-TPC-SD2241-T

Thermal Network Hybrid Speed Dome Camera



- Vanadium oxide uncooled focal plane detector.
- 4Megapixel progressive scan CMOS.
- AI functions: heat detection, tripwire, intrusion, human/vehicle classification, smoking detection, and call detection.
- Temperature measurement range of $-20\text{ }^{\circ}\text{C}$ to $+550\text{ }^{\circ}\text{C}$.
- Built-in white light and audio alarm.
- Pan: 0° to 360° , tilt: -15° to $+90^{\circ}$.
- Dual image fusion (visible and thermal images).
- Wide input voltage $12\text{ VDC} \pm 20\%$, and PoE.
- IP66 rated.

Featuring thermal and visible channels, Eureka series thermal network camera offers various AI functions such as tripwire, intrusion, call detection, smoking detection, heat detection and temperature monitoring. It can be used in short-distance monitoring scenes such as perimeter protection and heat monitoring, which provides an all-in-one video surveillance solution for small and medium scenes.

Technical Specification

Thermal

Detector Type	Vanadium oxide uncooled focal plane detector
Effective Pixels	256 (H) × 192 (V)
Pixel Pitch	12 μm
Spectral Range	8 μm –14 μm
Sensitivity (NETD)	$\leq 40\text{ mK}@f/1.0$
Focal Length	3.5 mm; 7 mm; 10 mm
Field of View	3.5 mm: H: 50.6° ; V: 37.8° 7 mm: H: 24° ; V: 18° 10 mm: H: 17.3° V: 13.1°
Thermal Focus Control	Fixed-focal
Close Focus Distance	3.5 mm: 0.5 m (1.64 ft) 7 mm: 1 m (3.28 ft) 10 mm: 1 m (3.28 ft)
Digital Detail Enhancement (DDE)	Yes
Digital Zoom	16 levels
Thermal AGC	Auto/Manual
Thermal Noise Reduction	2D NR/3D NR
Image Flip	180°
Color Palettes	18 (white hot/black hot/fusion/rainbow/golden autumn/midday/iron red/amber/jade/sunset/icefire/painting/pomegranate/emerald /spring/summer/autumn/winter)

Temperature Measurement Range	High temperature mode: $0\text{ }^{\circ}\text{C}$ to $+550\text{ }^{\circ}\text{C}$ ($+32\text{ }^{\circ}\text{F}$ to $+1022\text{ }^{\circ}\text{F}$) Low temperature mode: $-20\text{ }^{\circ}\text{C}$ to $+150\text{ }^{\circ}\text{C}$ ($-4\text{ }^{\circ}\text{F}$ to $+302\text{ }^{\circ}\text{F}$) Auto mode: $-20\text{ }^{\circ}\text{C}$ to $+550\text{ }^{\circ}\text{C}$ ($-4\text{ }^{\circ}\text{F}$ to $+1022\text{ }^{\circ}\text{F}$)
Temperature Measurement Accuracy	Max. ($\pm 2\text{ }^{\circ}\text{C}$, $\pm 2\%$); (Temperature: $-20\text{ }^{\circ}\text{C}$ to $+60\text{ }^{\circ}\text{C}$)
Temperature Measurement Mode	Spot: 12 Line: 12 Area: 12 Supports 12 rules simultaneously
Visible	
Image Sensor	1/2.7" CMOS
Max. Resolution	2336 (H) × 1752 (V)
Pixel	4 MP
Horizontal Definition	$\geq 1600\text{ TVL}$
Min. Illumination	Color: 0.05 lux B/W: 0.005 lux 0 lux (IR on)
Visible AGC	Auto/Manual
Visible Noise Reduction	2D NR/3D NR
S/N Ratio	$\geq 55\text{ dB}$
White Balance	Auto; indoor; outdoor; tracking; manual; natural; street lamp
Defog	Electronic defog
Electronic Shutter Speed	1 s–1/30,000 s (auto/manual)
BLC	Yes

WDR	DWDR
HLC	Yes
Day/Night	Auto (ICR); Color; B/W
Iris Control	Fixed
Image Flip	180°
Exposure Compensation	Yes
Visible Focus Control	Fixed-focal
Focal Length	4 mm; 8 mm; 12 mm
Field of View	4 mm: H: 71.2°; V: 52° 8 mm: H: 33.4°; V: 25° 12 mm: H: 22° V: 16.6°
Close Focus Distance	4 mm: 1 m (3.28 ft) 8 mm: 2.5 m (8.20 ft) 12 mm: 2.5 m (8.20 ft)
Aperture	4 mm: F1.6 8 mm: F2.0 12 mm: F2.0
Illuminator On/Off Control	Auto/Manual
Illumination Distance	4 mm: 35 m (114.83 ft) 8 mm: 50 m (164.04 ft) 12 mm: 50 m (164.04 ft)

Audio and Video

Video Compression	H.265; H.264; H.264H
Resolution	Thermal: Main stream: 1.3M (1280 × 960); X VGA (1024 × 768); VGA (640 × 480/256 × 192); 1280 × 960 (default) Sub stream: VGA (640 × 480/256 × 192); 256 × 192 (default) Visible: Main stream: 2336 × 1752; 1080p (1920 × 1080); 720p (1280 × 720); D1 (704 × 576); 2336 × 1752 (default) Sub stream: 720p (1280 × 720); D1 (704 × 576); CIF (352 × 288); 352 × 288 (default)
Video Frame Rate	Thermal: Main stream: 1 fps–25 fps, 25 fps by default Sub stream: 1 fps–25 fps, 15 fps by default Visible: Main stream: 1 fps–25 fps, 25 fps by default Sub stream: 1 fps–25 fps, 15 fps by default
Audio Compression	G.711a; G.711mu; PCM
Image Encoding Format	JPEG

PTZ

Pan/Tilt Range	Pan: 0° to 360° endless Tilt: -15° to +90°
Manual Control Speed	Pan: 0.1°/s –200°/s Tilt: 0.1°/s –120°/s
Preset Speed	Pan: 240°/s Tilt: 200°/s
Preset	300
Tour	8 (up to 32 presets per tour)
Pattern	5
Scan	5
Power-off Memory	Yes
Privacy Masking	4 areas in the same view

Idle Motion	Activate Preset/Scan/Tour/Pattern/Pan
Function	
Two-way Audio	Yes
Sound and Light Alarm	Yes
Network Protocol	HTTPS; HTTP; TCP; ARP; RTSP; RTP; UDP; RTCP; SMTP; FTP; DHCP; DNS; DDNS; PPPOE; IPv4/v6; SNMP; QoS; UPnP; NTP
Region of Interest (RoI)	Yes
Storage	Micro SD card
Micro SD Card (Max.)	256 GB
Interoperability	ONVIF; CGI; Dahua SDK
Browser	IE: IE 9 and later (Edge is not supported) Chrome: 42 and earlier Firefox: 42 and earlier
User/Host	Up to 10 (total bandwidth: 100 MB)
Security	Authorized username and password; attached MAC address; HTTPS; IEEE 802.1x; controlled network access
User Management	Up to 10 users; supports multi-level user permissions (2 levels): management group and user group
Malfunction Detection	Network disconnection detection; IP conflict detection; memory card state detection; memory space detection
Fusion Mode	Warm color; cold color; fuse with iron oxide red
PIP	Yes (Intelligence automatically turns off when PIP is on)

Intelligence

Heat Detection	Yes
Cold/Hot Spot Trace	Yes
IVS (Perimeter Protection)	Yes. Supports tripwire and intrusion.
Target Distinction	Human/Vehicle Classification
Smoking Detection	Yes
Call Detection	Yes

Port

Analog Output	1-ch CVBS output, BNC port
Network Port	1 × RJ-45 (10/100 Base-T)
Alarm Input	2
Alarm Output	1
Audio Input	1
Audio Output	1
RS-485	1

Power

Power Supply	12 VDC ± 20%, PoE+ (802.3at)
Power Consumption	Basic: <10.4 W (12 VDC); 10.5 W (PoE) Max: < 19.4 W (12 VDC); 19.6 W (PoE)

Environment

Operating Temperature	-30 °C to +60 °C (-22 °F to +140 °F)
-----------------------	--------------------------------------

Operating Humidity	≤95%
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)

Physical Characteristics

Protection	IP66
Reliability	Surge protection: 6 kV Air discharge of 15 kV Contact discharge of 8 kV
Anti-corrosion Level	Basic Protection *The products are designed for general use in areas that have no specific requirements for anti-corrosion protection.

Structure

Product Dimensions	295 mm × Φ160 mm (11.61" × Φ6.30")
Packaging Dimensions	267 mm × 267 mm × 437 mm (10.51" × 10.51" × 17.20") (W × L × H)
Net Weight	≤3.2 kg (7.05 lb)
Gross Weight	≤4.7 kg (10.36 lb)

Heat Detection Distance

Focal Length	Max. Distance
3.5 mm	45 m (147.64 ft)
7 mm	86 m (282.15 ft)
10 mm	123 m (403.54 ft)

Note:
The table displays the measured distances obtained from using the target size 0.2 m × 0.2 m for testing in an environment where the temperature is 23 °C and the relative humidity is below 60%.
The table is for reference only. The distances within it are subject to actual conditions including atmospheric conditions, target size, the installation site, and more.

Temperature Measurement Distance

Focal Length	Min. Distance	Max. Distance
3.5 mm	1 m (3.28 ft)	5 m (16.40 ft)
7 mm	2 m (6.56 ft)	8 m (26.25 ft)
10 mm	3 m (9.84 ft)	12 m (39.37 ft)

Note:
The table displays the measured distances obtained from using the target size 0.1 m × 0.1 m for testing in an environment where the temperature is 23 °C and the relative humidity is below 60%.
The table is for reference only. The distances within it are subject to actual conditions including atmospheric conditions, target size, the installation site, and more.

DRI Distance

Focal Length	Detection Distance ^①	Recognition Distance ^②	Identification Distance ^③
3.5 mm	Vehicle: 447 m (1,466.54 ft); Human: 146 m (479.00 ft)	Vehicle: 112 m (367.45 ft); Human: 36 m (118.11 ft)	Vehicle: 56 m (183.73 ft); Human: 18 m (59.06 ft)
7 mm	Vehicle: 894 m (2,933.07 ft); Human: 292 m (958.01 ft)	Vehicle: 224 m (734.91 ft); Human: 73 m (239.50 ft)	Vehicle: 112 m (367.45 ft); Human: 36 m (118.11 ft)

10 mm	Vehicle: 1,278 m (4,192.91 ft); Human: 417 m (1,368.11 ft)	Vehicle: 319 m (1,046.59 ft); Human: 104 m (341.21 ft)	Vehicle: 160 m (524.93 ft); Human: 52 m (170.60 ft)
-------	---	---	--

- ① Detection Distance: Detects objects, but cannot recognize their characteristics (objects must cover more than 1.5 pixels of the image).
- ② Recognition Distance: Classifies objects into general categories, such as human, vehicle (the object must cover more than 6 pixels of the image).
- ③ Identification Distance: Classifies objects into specific categories based on their characteristics, such as engineering truck, car (the object must cover more than 12 pixels of the image).

Note:
The table is the standard theoretical calculation and is for reference only. The distances within it are subject to actual conditions including atmospheric conditions, target size, the installation site, and more. For the intelligent detection distance, refer to the table of Perimeter Protection Distance (IVS Distance) above.

Ordering Information

Type	Model	Description
Thermal Camera	DHI-TPC-SD2241-TB3F4-DW-S2	Thermal: 3.5 mm; Visible: 4 mm
	DHI-TPC-SD2241-TB7F8-DW-S2	Thermal: 7 mm; Visible: 8 mm
	DHI-TPC-SD2241-TB10F12-DW-S2	Thermal: 10 mm; Visible: 12 mm
Accessories	PFB305W	Wall Mount Bracket
	PFB305W + PFA150	Wall Mount Bracket + Pole Mount Bracket (Pole Mount)
	PFB305W + PFA151	Wall Mount Bracket + Corner Mount Bracket (Corner Mount)
	PFA111 + PFB300C	Joint Connector + Hang Mount Bracket (Hang Mount)

Accessories

Included:



PFB305W
Wall Mount Bracket

Optional:




PFB305W + PFA150
Wall Mount Bracket + pole Mount Bracket (Pole Mount)



PFB305W + PFA151
Wall Mount Bracket + Corner Mount Bracket (Corner Mount)



PFA111 + PFB300C
Joint Connector + Hang Mount Bracket (Hang Mount)

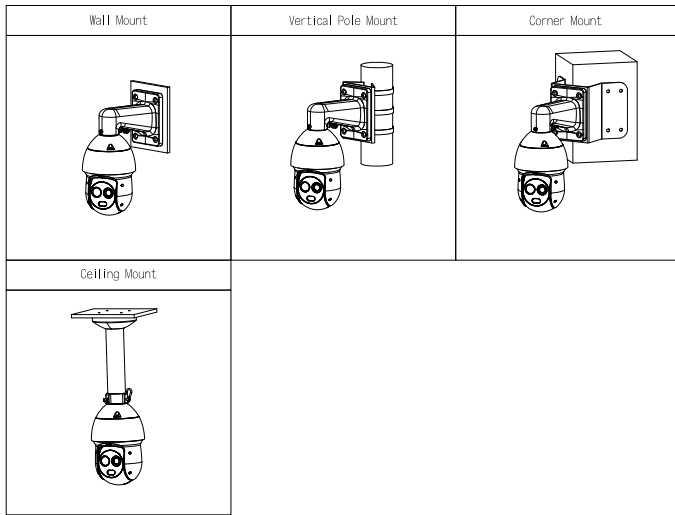

Dimensions (mm[inch])

