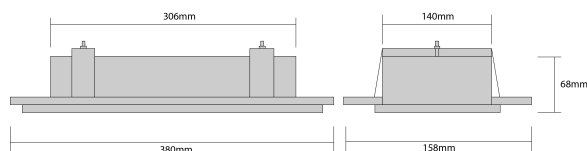


HOLLINSEND

HOLLINSEND LED Recessed Emergency Bulkhead, Slave, 230V, Chrome, Opal Diffuser



GENERAL DATA

| | |
|--------------------------|---------------|
| Light Source | LED |
| Light Source Replaceable | Yes |
| Colour/Finish | Chrome |
| Material | Metal |
| Diffuser Type | Opal |
| Diffuser Material | Polycarbonate |
| IP Rating | IP20 |
| Mounting Type | Recessed |
| Warranty (Years) | 5 |
| Life Time Hours | 30,000 |

DIMENSIONS & WEIGHT

| | |
|-------------|------|
| Length (mm) | 380 |
| Width (mm) | 158 |
| Depth (mm) | 68 |
| Weight (g) | 1434 |

BLE LIGHTING AND POWER LTD

Unit 3, Drake Business Park, Drake House Crescent, Sheffield, S20 7HT
T: 01246 432325, E: sales@blelighting.co.uk, W: www.blelighting.co.uk

This document is uncontrolled if printed, all information is subject to change. Generated on 15/01/24

ELECTRICAL

| | |
|----------------------------|----------|
| Input Voltage (V) | 220-240 |
| Input Frequency (Hz) | 50 |
| Wattage (W) | 3 |
| Classification | Class I |
| Operating Temperature (°c) | 0 to +40 |
| Power Factor | 0.92 |

OPTICAL

| | |
|-------------------------|-------|
| Colour Temperature | 5000K |
| CRI | 80 |
| Beam Angle (°) | 120 |
| Lumen Output Mains (lm) | 250 |

EMERGENCY

| | |
|-------------------|----------------|
| Mode Of Operation | CBU Controlled |
|-------------------|----------------|

STANDARDS & APPROVALS

| | |
|---------------------------------|---------------------------------|
| Manufactured in Accordance with | BS EN 60598-1, BS EN 60598-2-22 |
| CE Mark | Yes |
| UKCA Mark | Yes |
| WEEE Symbol | Yes |
| Accredited Members | ISO 9001, LIA, ICEL |

PACKAGING





| | |
|-----------------------|-----|
| Packaging Length (mm) | 390 |
| Packaging Width (mm) | 170 |
| Packaging Depth (mm) | 97 |





Spacing Tables

BLE LIGHTING AND POWER LTD

Unit 3, Drake Business Park, Drake House Crescent, Sheffield, S20 7HT
T: 01246 432325, E: sales@blelighting.co.uk, W: www.blelighting.co.uk

This document is uncontrolled if printed, all information is subject to change. Generated on 15/01/24

| SLAVE | ESCAPE ROUTE 2 METRES WIDE (1 LUX MIN) | | | |
|---------------------|---|---|---|---|
| |  |  |  |  |
| Mounting Height (M) | Transverse to Wall | Transverse to Transverse | Axial to Wall | Axial to Axial |
| 2.5m | 3.9 | 8.5 | 2.5 | 6.4 |
| 3.0m | 4.4 | 9.9 | 2.6 | 6.8 |
| 4.0m | 5.0 | 11.9 | 2.8 | 7.4 |

| SLAVE | OPEN (ANTI-PANIC) AREA (0.5 LUX MINIMUM) | | | |
|---------------------|---|---|---|---|
| |  |  |  |  |
| Mounting Height (M) | Transverse to Wall | Transverse to Transverse | Axial to Wall | Axial to Axial |
| 2.5m | 4.2 | 9.1 | 3.2 | 8.0 |
| 3.0m | 4.9 | 10.5 | 3.4 | 8.6 |
| 4.0m | 6.1 | 13.4 | 3.7 | 9.5 |

BLE LIGHTING AND POWER LTD

Unit 3, Drake Business Park, Drake House Crescent, Sheffield, S20 7HT
 T: 01246 432325, E: sales@blelighting.co.uk, W: www.blelighting.co.uk

This document is uncontrolled if printed, all information is subject to change. Generated on 15/01/24