


OXLEY

OXLEY LED Circular Amenity Light, IP54, White, LiFePO4 Battery, Microwave Sensor, 3CCT





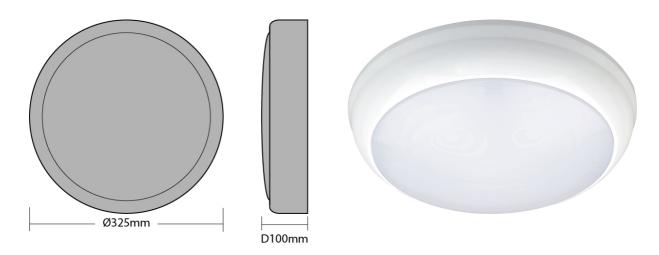















GENERAL DATA

Light Source	LED
Light Source Replaceable	No
Colour/Finish	White
Material	Polycarbonate
Diffuser Type	Opal
Diffuser Material	Polycarbonate
IP Rating	IP54
IK Rating	IKO8
Mounting Type	Surface
Warranty (Years)	5
Life Time Hours	50,000

DIMENSIONS & WEIGHT

BLE LIGHTING AND POWER LTD



Depth (mm)	100
Diameter (mm)	325
Weight (g)	1140
ELECTRICAL	
Input Voltage (V)	220-240
Input Frequency (Hz)	50
Wattage (W)	15
Classification	Class II
Operating Temperature (°c)	0 to +40
Power Factor	0.9
OPTICAL	
Colour Temperature	3CCT
CRI	80
Beam Angle (º)	120
Lumen Output Mains (lm)	1500lm (at 4000K)
EMERGENCY	
Battery Type	LiFePO4 6.4V
Battery Capacity	1.0Ah
Battery Warranty (Years)	5
Recharge Time (hrs)	24
Battery Replaceable	Yes
Test Procedure	Manual
Emergency Duration (Hrs)	3
Lumen Output Emergency (Im)	180lm (at 4000K)
SENSOR DETAILS	
Sensor Technology	Microwave Sensor
Maximum Mounting Height	3.5
Detection Area	8M at 2.5M High
Daylight Threshold	10 lux to 500 lux
Detection Radius (°)	8M max

STANDARDS & APPROVALS

BLE LIGHTING AND POWER LTD

DATA SHEET

EL-120651-M3-MW



Manufactured in Accordance with	BS EN 60598-1, BS EN 60598-2-22
CE Mark	Yes
UKCA Mark	Yes
WEEE Symbol	Yes
Accredited Members	ISO 9001, LIA, ICEL
PACKAGING	
Packaging Length (mm)	352
Packaging Width (mm)	330
Packaging Depth (mm)	115