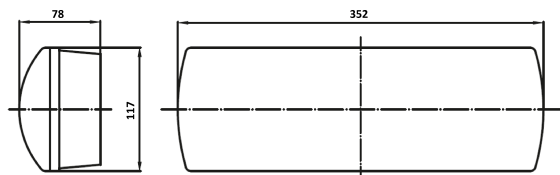


CROOKES

CROOKES LED Emergency Slave Bulkhead, IP65, Slave, 110V

awex[®]
EMERGENCY LIGHTING

GENERAL DATA

| | |
|--------------------------|---------------|
| Light Source | LED |
| Light Source Replaceable | No |
| Colour/Finish | White |
| Material | Polycarbonate |
| Diffuser Type | Prismatic |
| Diffuser Material | Polycarbonate |
| IP Rating | IP65 |
| IK Rating | IK08 |
| Mounting Type | Surface |
| Warranty (Years) | 3 |
| Life Time Hours | 50000 |

DIMENSIONS & WEIGHT

| | |
|-------------|-----|
| Length (mm) | 352 |
| Width (mm) | 117 |
| Depth (mm) | 78 |
| Weight (g) | 510 |

ELECTRICAL

BLE LIGHTING AND POWER LTD

Unit 3, Drake Business Park, Drake House Crescent, Sheffield, S20 7HT

T: 01246 432325, E: sales@blelighting.co.uk, W: www.blelighting.co.uk

This document is uncontrolled if printed, all information is subject to change. Generated on 09/01/24

| | |
|----------------------------|----------|
| Input Voltage (V) | 110 |
| Input Frequency (Hz) | 50 |
| Wattage (W) | 1.6 |
| Classification | Class II |
| Operating Temperature (°C) | 0 to +40 |

OPTICAL

| | |
|-------------------------|-------|
| Colour Temperature | 6000K |
| CRI | 70 |
| Beam Angle (°) | 142 |
| Lumen Output Mains (lm) | 180 |
| Viewing Distance (M) | 19 |





STANDARDS & APPROVALS





| | |
|---------------------------------|---------------------|
| Manufactured in Accordance with | BS EN 60598-1 |
| CE Mark | Yes |
| UKCA Mark | Yes |
| WEEE Symbol | Yes |
| Accredited Members | ISO 9001, LIA, ICEL |

PACKAGING

| | |
|-----------------------|-----|
| Packaging Length (mm) | 360 |
| Packaging Width (mm) | 124 |
| Packaging Depth (mm) | 84 |

Spacing Tables

| ESCAPE ROUTE 2 METRES WIDE (1 LUX MIN) | | | | |
|--|---|---|---|---|
| |  |  |  |  |
| Mounting Height (M) | Transverse to Wall | Transverse to Transverse | Axial to Wall | Axial to Axial |
| 2.5m | 2.6 | 7.3 | 2.7 | 6.8 |
| 3.0m | 2.6 | 7.3 | 2.8 | 7.1 |
| 4.0m | 2.6 | 7.5 | 2.5 | 7.9 |

| OPEN (ANTI-PANIC) AREA (0.5 LUX MINIMUM) | | | | |
|--|---|---|---|---|
| |  |  |  |  |
| Mounting Height (M) | Transverse to Wall | Transverse to Transverse | Axial to Wall | Axial to Axial |
| 2.5m | 3.6 | 9.8 | 3.4 | 8.4 |
| 3.0m | 3.6 | 10.3 | 3.5 | 9.3 |
| 4.0m | 3.8 | 10.1 | 3.9 | 10 |

BLE LIGHTING AND POWER LTD

Unit 3, Drake Business Park, Drake House Crescent, Sheffield, S20 7HT
 T: 01246 432325, E: sales@blelighting.co.uk, W: www.blelighting.co.uk

This document is uncontrolled if printed, all information is subject to change. Generated on 09/01/24