


CROOKES

CROOKES LED Emergency Slave Bulkhead, IP65, Slave, 230V

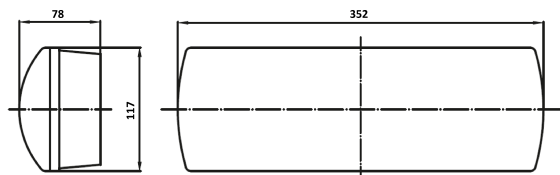

GENERAL DATA

Light Source	LED
Light Source Replaceable	No
Colour/Finish	White
Material	Polycarbonate
Diffuser Type	Prismatic
Diffuser Material	Polycarbonate
IP Rating	IP65
IK Rating	IK08
Mounting Type	Surface
Warranty (Years)	3
Life Time Hours	50000

DIMENSIONS & WEIGHT

Length (mm)	352
Width (mm)	117
Depth (mm)	78

BLE LIGHTING AND POWER LTD

Unit 3, Drake Business Park, Drake House Crescent, Sheffield, S20 7HT

T: 01246 432325, E: sales@blelighting.co.uk, W: www.blelighting.co.uk

This document is uncontrolled if printed, all information is subject to change. Generated on 09/01/24

Weight (g)	510
------------	-----

ELECTRICAL

Input Voltage (V)	220-240
-------------------	---------

Input Frequency (Hz)	50
----------------------	----

Wattage (W)	1.1
-------------	-----

Classification	Class II
----------------	----------

Operating Temperature (°C)	0 to +40
----------------------------	----------

Power Factor	0.55
--------------	------

OPTICAL

Colour Temperature	6000K
--------------------	-------

CRI	70
-----	----

Beam Angle (°)	142
----------------	-----

Lumen Output Mains (lm)	180
-------------------------	-----

Viewing Distance (M)	19
----------------------	----

STANDARDS & APPROVALS

Manufactured in Accordance with	BS EN 60598-1
---------------------------------	---------------

CE Mark	Yes
---------	-----

UKCA Mark	Yes
-----------	-----

WEEE Symbol	Yes
-------------	-----

Accredited Members	ISO 9001, LIA, ICEL
--------------------	---------------------

PACKAGING

Packaging Length (mm)	360
-----------------------	-----

Packaging Width (mm)	124
----------------------	-----

Packaging Depth (mm)	84
----------------------	----

Spacing Tables

BLE LIGHTING AND POWER LTD

Unit 3, Drake Business Park, Drake House Crescent, Sheffield, S20 7HT

T: 01246 432325, E: sales@blelighting.co.uk, W: www.blelighting.co.uk

This document is uncontrolled if printed, all information is subject to change. Generated on 09/01/24



ESCAPE ROUTE 2 METRES WIDE (1 LUX MIN)				
Mounting Height (M)	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial
2.5m	2.6	7.3	2.7	6.8
3.0m	2.6	7.3	2.8	7.1
4.0m	2.6	7.5	2.5	7.9

OPEN (ANTI-PANIC) AREA (0.5 LUX MINIMUM)				
Mounting Height (M)	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial
2.5m	3.6	9.8	3.4	8.4
3.0m	3.6	10.3	3.5	9.3
4.0m	3.8	10.1	3.9	10

BLE LIGHTING AND POWER LTD

Unit 3, Drake Business Park, Drake House Crescent, Sheffield, S20 7HT
T: 01246 432325, E: sales@blelighting.co.uk, W: www.blelighting.co.uk

This document is uncontrolled if printed, all information is subject to change. Generated on 09/01/24