
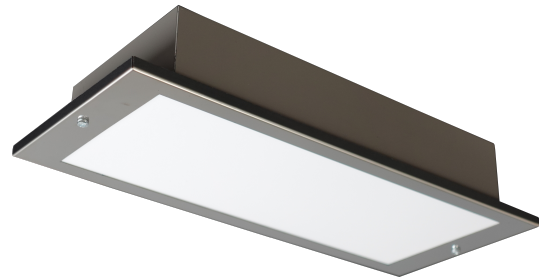


HOLLINSEND

HOLLINSEND LED Recessed Emergency Bulkhead, Slave, 24V, Chrome, Opal Diffuser

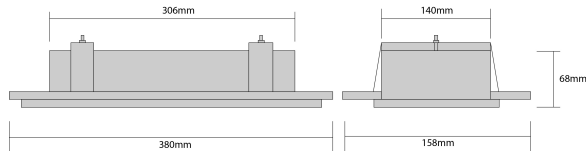

GENERAL DATA

Light Source	LED
Light Source Replaceable	Yes
Colour/Finish	Chrome
Material	Metal
Diffuser Type	Opal
Diffuser Material	Polycarbonate
IP Rating	IP20
Mounting Type	Recessed
Warranty (Years)	5
Life Time Hours	30,000

DIMENSIONS & WEIGHT

Length (mm)	380
Width (mm)	158
Depth (mm)	68
Weight (g)	1434

ELECTRICAL

BLE LIGHTING AND POWER LTD

Unit 3, Drake Business Park, Drake House Crescent, Sheffield, S20 7HT

T: 01246 432325, E: sales@blelighting.co.uk, W: www.blelighting.co.uk

This document is uncontrolled if printed, all information is subject to change. Generated on 15/01/24

Input Voltage (V)	24
Input Frequency (Hz)	50
Wattage (W)	3
Classification	Class I
Operating Temperature (°C)	0 to +40
Power Factor	0.92

OPTICAL

Colour Temperature	5000K
CRI	80
Beam Angle (°)	120
Lumen Output Mains (lm)	250

EMERGENCY

Mode Of Operation	CBU Controlled
-------------------	----------------

STANDARDS & APPROVALS

Manufactured in Accordance with	BS EN 60598-1, BS EN 60598-2-22
CE Mark	Yes
UKCA Mark	Yes
WEEE Symbol	Yes
Accredited Members	ISO 9001, LIA, ICEL

PACKAGING

Packaging Length (mm)	390
Packaging Width (mm)	170
Packaging Depth (mm)	97

Spacing Tables

SLAVE	ESCAPE ROUTE 2 METRES WIDE (1 LUX MIN)			
				
Mounting Height (M)	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial
2.5m	3.9	8.5	2.5	6.4
3.0m	4.4	9.9	2.6	6.8
4.0m	5.0	11.9	2.8	7.4

SLAVE	OPEN (ANTI-PANIC) AREA (0.5 LUX MINIMUM)			
				
Mounting Height (M)	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial
2.5m	4.2	9.1	3.2	8.0
3.0m	4.9	10.5	3.4	8.6
4.0m	6.1	13.4	3.7	9.5

BLE LIGHTING AND POWER LTD

Unit 3, Drake Business Park, Drake House Crescent, Sheffield, S20 7HT
 T: 01246 432325, E: sales@blelighting.co.uk, W: www.blelighting.co.uk

This document is uncontrolled if printed, all information is subject to change. Generated on 15/01/24