


# HOLLINSEND

## HOLLINSEND LED Recessed Emergency Bulkhead, Slave, 50V, White, Opal Diffuser

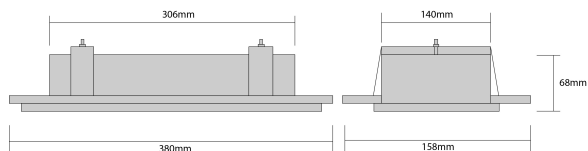

### GENERAL DATA

|                          |               |
|--------------------------|---------------|
| Light Source             | LED           |
| Light Source Replaceable | Yes           |
| Colour/Finish            | White         |
| Material                 | Metal         |
| Diffuser Type            | Opal          |
| Diffuser Material        | Polycarbonate |
| IP Rating                | IP20          |
| Mounting Type            | Recessed      |
| Warranty (Years)         | 5             |
| Life Time Hours          | 30,000        |

### DIMENSIONS & WEIGHT

|             |      |
|-------------|------|
| Length (mm) | 380  |
| Width (mm)  | 158  |
| Depth (mm)  | 68   |
| Weight (g)  | 1434 |

### ELECTRICAL

#### BLE LIGHTING AND POWER LTD

Unit 3, Drake Business Park, Drake House Crescent, Sheffield, S20 7HT

T: 01246 432325, E: sales@blelighting.co.uk, W: www.blelighting.co.uk

This document is uncontrolled if printed, all information is subject to change. Generated on 15/01/24

|                            |          |
|----------------------------|----------|
| Input Voltage (V)          | 50       |
| Input Frequency (Hz)       | 50       |
| Wattage (W)                | 3        |
| Classification             | Class I  |
| Operating Temperature (°C) | 0 to +40 |
| Power Factor               | 0.92     |

## OPTICAL

|                         |       |
|-------------------------|-------|
| Colour Temperature      | 5000K |
| CRI                     | 80    |
| Beam Angle (°)          | 120   |
| Lumen Output Mains (lm) | 250   |

## EMERGENCY

|                   |                |
|-------------------|----------------|
| Mode Of Operation | CBU Controlled |
|-------------------|----------------|

## STANDARDS & APPROVALS

|                                 |                                 |
|---------------------------------|---------------------------------|
| Manufactured in Accordance with | BS EN 60598-1, BS EN 60598-2-22 |
| CE Mark                         | Yes                             |
| UKCA Mark                       | Yes                             |
| WEEE Symbol                     | Yes                             |
| Accredited Members              | ISO 9001, LIA, ICEL             |

## PACKAGING

|                       |     |
|-----------------------|-----|
| Packaging Length (mm) | 390 |
| Packaging Width (mm)  | 170 |
| Packaging Depth (mm)  | 97  |

## Spacing Tables

| SLAVE               | ESCAPE ROUTE 2 METRES WIDE (1 LUX MIN)                                              |                                                                                     |                                                                                     |                                                                                     |
|---------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                     |  |  |  |  |
| Mounting Height (M) | Transverse to Wall                                                                  | Transverse to Transverse                                                            | Axial to Wall                                                                       | Axial to Axial                                                                      |
| 2.5m                | 3.9                                                                                 | 8.5                                                                                 | 2.5                                                                                 | 6.4                                                                                 |
| 3.0m                | 4.4                                                                                 | 9.9                                                                                 | 2.6                                                                                 | 6.8                                                                                 |
| 4.0m                | 5.0                                                                                 | 11.9                                                                                | 2.8                                                                                 | 7.4                                                                                 |

| SLAVE               | OPEN (ANTI-PANIC) AREA (0.5 LUX MINIMUM)                                            |                                                                                     |                                                                                     |                                                                                     |
|---------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                     |  |  |  |  |
| Mounting Height (M) | Transverse to Wall                                                                  | Transverse to Transverse                                                            | Axial to Wall                                                                       | Axial to Axial                                                                      |
| 2.5m                | 4.2                                                                                 | 9.1                                                                                 | 3.2                                                                                 | 8.0                                                                                 |
| 3.0m                | 4.9                                                                                 | 10.5                                                                                | 3.4                                                                                 | 8.6                                                                                 |
| 4.0m                | 6.1                                                                                 | 13.4                                                                                | 3.7                                                                                 | 9.5                                                                                 |

### BLE LIGHTING AND POWER LTD

Unit 3, Drake Business Park, Drake House Crescent, Sheffield, S20 7HT  
T: 01246 432325, E: sales@blelighting.co.uk, W: www.blelighting.co.uk

This document is uncontrolled if printed, all information is subject to change. Generated on 15/01/24