



Fig. 1. I30 Teletone Tampered Sounder 16 Ohm


To ensure correct seating, (when assembling Teletone Casework), that the case cover pin is on the topmost inside face, (shown by the arrow).

Although possible to rotate the top cover through 180°, it will not seat properly when pressed together.

	Model	I30
Grade 3 Class II	●	
ABS Body & Cover	●	
Resistor 16 Ohm	●	
TACT-Switch Tamper	●	
Surface Mounted	●	
Snap Fit Case	●	
Concealed Fixings	●	
4 terminals	●	

Dimensions

Length	100mm
Width	67mm
Height	32mm

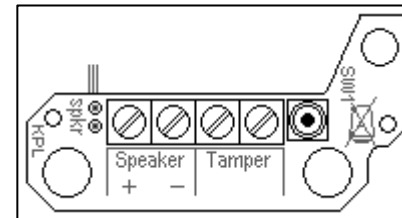

**Description:**  
Teletone Tampered Sounder

**Materials:**  
Case Body and Cover - ABS

**Temperature Range:**  
-40°C - +50°C

**Tamper:**  
TACT switch

**Speaker:**  
Diameter 45mm  
Mylar – 16 Ohm, 0.25 Watt

**Frequency range:**  
4Khz

**Resonance:**  
450Hz ±90Hz

**Sound Power Output**  
86 ±2dB @ 50cm

**Voltage Range:**  
0-125v AC Max  
0-200v DC Max

**Colour:**  
White

**Fittings:**  
4 x Wire Clamping Terminals  
4 x Concealed Fixing Screws

**KNIGHT**  
FIRE & SECURITY PRODUCTS LTD  
**email:** info@knightplastics.com

Unit 84 Seawall Road Ind. Estate  
Cardiff UK CF24 5TH  
**Tel:** 0 (00 44) 29 20 48 81 29  
**Fax:** 0 (00 44) 29 20 48 91 32

Drawing No: **I30 Teletone Sounder**

Drawn: *Chris Moorman*

Date: 11/02/08

All units in mm  
Do not scale



© Knight Fire & Security Products Ltd  
All cases of TM Infringement will be pursued.