

CQR SENZA **S**

Versatile by Design



CQR SENZA **S**



BACKLIT



GRADE 2



GRADE 3

Also Available

CQR
SENZA **X**

CQR

First choice for quality



+44(0)151 606 1000  www.cqr.co.uk  info@cqr.co.uk



CQR SENZA S

Versatile by Design

- EN50131-4 Grade 2 and Grade 3 options
- Backlit option - 'Dusk to dawn or ON' *backlit model only*
- Comfort LEDs
- Lithium smart battery charging
- SAB/SCB option
- Confirmed alarm input - Audible and LED strobe - optional *plus models*
- Self test input *plus models*
- Fault relay output *plus models*
- Trigger polarity -/+
- Tamper polarity -/+ *plus models*
- Trigger wire monitoring *plus models*
- Adjustable siren timer 3min / 15min / intermittent *depending on model*
- Adjustable siren volume Hi/Lo

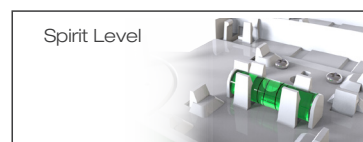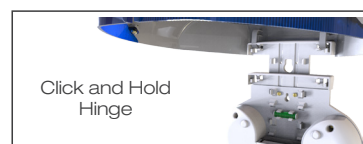

Order Code:	Description
BCSENZ/S/STD/W	Senza S Grade 2 Backplate White
BCSENZ/S/PLUS/W	Senza S Grade 2/3 Backplate White
BCSENZ/S/PLUS/L/W	Senza S Grade 2/3 Backplate White with Backlight
BCSENZ/S/COV/W/B	Senza S Cover White with Blue Lens
BCSENZ/S/COV/W/B/L	Senza S Cover White with Blue Lens with Backlight Panel
BCSENZ/S/DUM/WH	Senza S Dummy Backplate White

Specifications:	Standard	Plus
Housing material	UV Stable & Vandal Resistant ABS	
Quiescent current	40mA	40mA
Total current in alarm	360mA	360mA
Comfort LEDs	Tamper, Hold Off, Battery Charging	
SAB / SCB	SAB	SAB / SCB
Engineer hold off	✓	✓
Trigger wire monitoring	x	✓
Tamper protection	Wall and cover	
Sounder type	Piezo	Piezo
No. of sounders	1	1
Sounder output	105dB(A) @ 1m	105dB(A) @ 1m
Backlight	x	Optional
Timer options	15min / Int	3min / 15min / Int
Visual Indicator type	LED Strobe	
Battery	Lithium Battery 3.7v 2000mAh	
Dimensions	300 x 200 x 70	300 x 200 x 70
IP Rating	IP44	IP44
Grade	Grade 2 Env IV	Grade 2/3 Env IV

Wire-Free also available:



CQR

First choice for quality

Ver. 1.0

+44(0)151 606 1000

www.cqr.co.uk

info@cqr.co.uk